

45-100 CFM Hydraulic Motor Driven Rotary Screw Compressor



40 cfm @ 150 psi

60 cfm @ 150 psi


125 cfm @ 150 psi

Features

- Airend manufactured with German rotary screw components
- Spin on separator
- Spin on oil filter
- Single solenoid operation
- UL control components
- Omega profile rotors
- Easy to remove bolt on compressor oil cooler
- Operating pressures from 100-190 psi
- Heavy duty air filter
- Factory filled with premium synthetic fluid
- Standard steel cover

Elite Features

- All basic features
- Air/Oil Cooler
- Aluminum diamond plate cover
- Vibration isolation pads
- Freight pre-paid in the 48 states & southern Canada

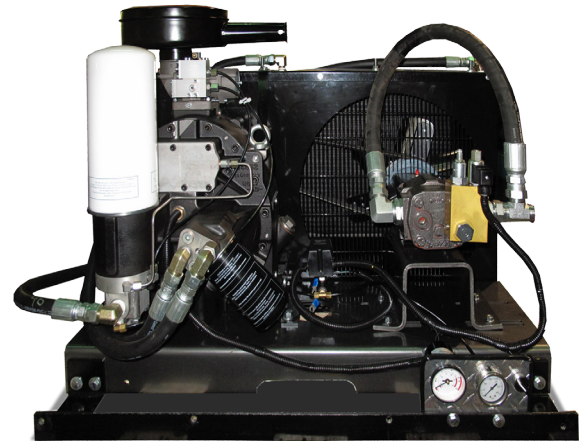

Model	CFM	PSI	Elite/Basic	Length	Width	Height	GPM	PSI
H-BM40RS	40	150	Basic	32	19	24	14	2250
H-BM40RS-E	40	150	Elite	32	19	24	14	2250
H-BM60	60	150	Basic	40	26	28	18	2250
H-BM60-E	60	150	Elite	40	26	28	18	2250
H-BM125	125	150	Basic	40	27	34	30	2850
H-BM125-E	125	150	Elite	40	27	34	30	2850

No Start Up Kit Required

Optional 5-year Pump Warranty Available. See catalog for additional options

Compressed Air Systems

Simplicity. It's What We Do.

compressed-air-systems.com | 1-800-531-9656 | Fax 972-352-6364

© Compressed Air Systems, LLC 7-2017

