

15 HP Oil Free Compressors



Simplex
45 cfm @120 psi

Dúplex Time Delay
90 cfm @ 120 psi


Dúplex Alternating
45 cfm @ 120 psi

Features

- Heavy duty single stage oil free industrial pump
- Heavy duty TEFC industrial grade electric motor
- ASME/CRN powder coated air receiver
- All UL/CSA electrical controls
- Auto start stop
- Magnetic motor starter
- Fully enclosed belt guard
- Heavy duty air filters

Elite Compressor Features

- All basic features
- Belt guard after cooler
- Vibration pads
- Tanque discharge ball valve
- Freight pre-paid in CAS pre-paid area

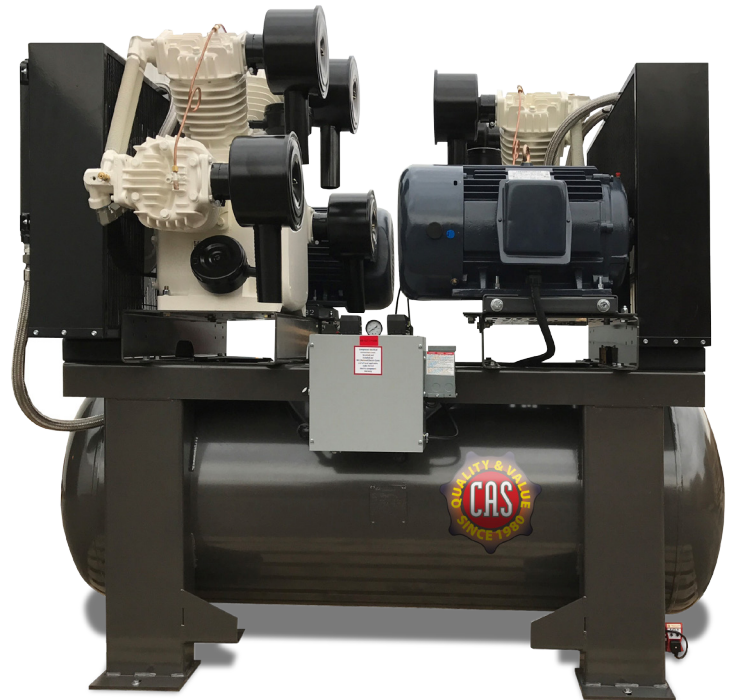

Model	Phase	Voltage	Tank	Length	Width	Height	Amp Draw 230 Volt	Amp Draw 480 Volt
B153H120-OF	3	208-230/460-480	120 Galones Horizontal	76	36	60	42	21
B153H240-OF	3	208-230/460-480	240 Galones Horizontal	82	42	66	42	21
DB153H240-OF	3	208-230/460-480	240 Galones Horizontal	78	50	64	84	42

Añadir a E para modelar el número de modelo para hacer el modelo Elite

No Start Up Kit Required

Optional 5-year Pump Warranty Available. See catalog for additional options

Compressed Air Systems

Simplicity. It's What We Do.

compressed-air-systems.com | 1-800-531-9656 | Fax 972-352-6364

© Compressed Air Systems, LLC 4-2017

