

125 cfm Gas | 140 cfm Diesel Engine Driven Rotary Screw Compressor



Features


- Airend manufactured with German rotary screw components
- ASME Powder coated air receiver
- Drive engine on left side for safety
- Easy to read and access gauges
- Easy to remove bolt on oil cooler for cleaning
- Extended oil drain with ball valve for easy service
- Factory filled with premium synthetic fluid
- Fully enclosed belt guard
- Full saddle mounting feet instead of pegged mounting feet
- Heavy duty air filter
- Industrial-duty drive engine
- Omega profile rotors
- Operating pressures from 100-190 psi available
- Simplified operating controls, no complicated micro-processor
- Single control solenoid operation
- Spin on oil filter
- Spin on separator

Elite Package Features

- All basic features
- Air/oil cooler
- Battery mounted and wired
- SIMPLEX controls
- Tank discharge ball valve
- Vibration isolation pads
- Free freight in the 48 states & southern Canada

Gas
125 cfm @ 150 psi

Diesel
140 cfm @ 150 psi

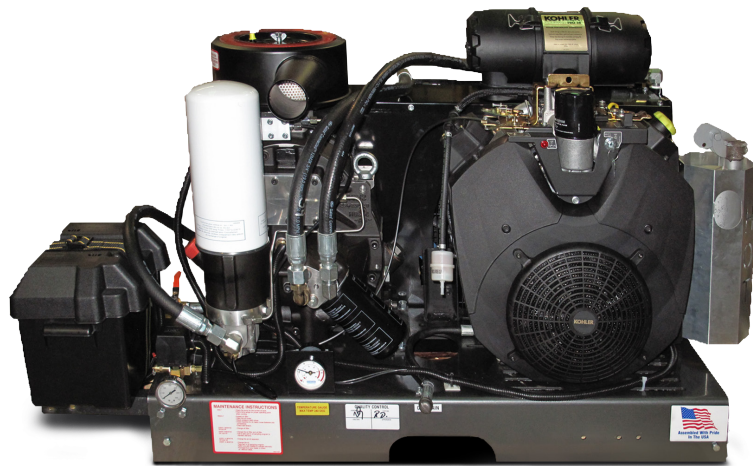

Model	HP	Mount	Tank	Drive Engine	Length	Width	Height
RS38GECBM	38	Basemount	N/A	Kohler	48	38	48
RS35GECBM	34	Basemount	N/A	Kohler Diesel	50	42	48

Add -E after model number to make Elite Model. Unit does not come standard with fuel tank.

No Start Up Kit Required

Optional 5-year Pump Warranty Available

See catalog for additional options

Compressed Air Systems

Simplicity. It's What We Do.

compressed-air-systems.com | 1-800-531-9656 | Fax 972-352-6364

© Compressed Air Systems, LLC 3-2019

